


# MICRO EXIT COMBO SERIES

## Thermoplastic Combo LED Exit Sign/Emergency Light

Energy-saving combination LED exit sign and emergency lighting unit in one compact, modern design, flexibility and multi-function capabilities. Innovative LED Lamp heads.



### DIMENSIONS

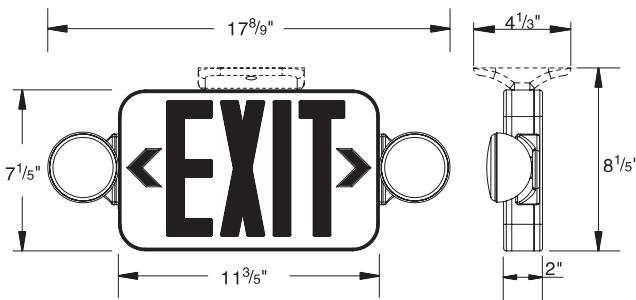

### FEATURES

- Injection-molded, high impact, UL 94 V-0 Thermoplastic
- Snap-together construction speeds installation
- Universal mounting plate with quick-connect feature
- Universal J-box pattern
- Field replacement chevron directional indicator knockouts
- Universal single face and double face (extra faceplate included)
- Fully adjustable glare-free lighting heads
- White housing is standard, with an optional black housing available
- LED expected life is more than 10 years
- Vf (V) for lamp head LED is max. 3.6V, 20mA, max. wattage is 0.072W
- Dual-voltage input 120V or 277V AC operation
- Combo unit includes test switch
- Status indicator lamp
- Maintenance free sealed 3.6V Ni-Cad rechargeable battery which provides 90 minutes of emergency power
- UL 924 listed
- UL indoor damp location listed standard, 68°F (20°C) to 86°F (30°C)
- National Electrical Code (NEC)
- Five-year warranty

### ELECTRICAL SPECIFICATIONS

Model	Current(mA)/Power(W)	
	@120VAC,60Hz	@277VAC,60Hz
PAC0434BXGX	32/3.9	15/3.9
PAC0434BXRX	44/5.0	17/4.8
PAC0434BXGXH	32/3.9	15/3.91
PAC0434BXRXH	44/5.0	17/4.85
PAC0434BXGXHRC	32/3.9	15/3.9
PAC0434BXRXHRC	44/5.0	17/4.8
PAC0434BXGXHSD	27/3.0	12/3.0
PAC0434BXRXHSD	25/2.8	11/2.8
PAC0434BXGXHRCSD	38/4.1	17/4.2
PAC0434BXRXHRCSD	38/4.1	17/4.0

### RUN TIME CHART OF REMOTE CAPABLE PAC0434

Remote Head QTY	0	1	2	3	4
Hrs of Operation	3 Hrs	2 Hrs	1.5 Hrs	N/A	N/A

### ORDERING INFORMATION

Series	Operation	Number of Faces	Letter Color	Housing Finish	Options	Function
PAC0434	<b>B</b> = Battery Backup	<b>1</b> = One Face <b>2</b> = Two Face	<b>R</b> = Red <b>G</b> = Green	<b>W</b> = White <b>B</b> = Black	<b>Blank</b> = None <b>H</b> = High Brightness Lamp Head <b>RC</b> = Remote Load Capability <b>HRC</b> = High Brightness Lamp with Remote Capability	<b>Blank</b> = Standard <b>SD</b> = Self-Diagnostic

**NOTE:** Remote Capable and Self-Diagnostic only available in High Brightness Units