

LFXMAX SERIES Outdoor Lighting

LFXMAX-XL-200-300W-MCTP-PSR-480V

LFXMAX SPEC SERIES MAXIMUM-FEATURE AREA/FLOOD LIGHT, SENSOR & PHOTOCELL READY

MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)

WESTGATE

THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

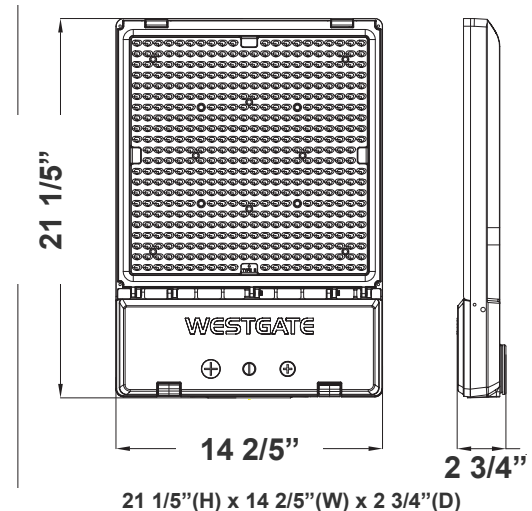

the LFXMAX Flood Light by Westgate: compatible with all LFX mounts, featuring a rotatable lens for precise lighting, a selection of lens types, and adjustable wattage and CCT. Perfect for versatile, efficient lighting solutions.

Features

- DLC Premium & LED High-Lumen Flood lights
- Solid State Lighting Technology for Long Life
- No Maintenance Needed and High-Efficiency
- 7-Year Warranty
- Optic Lens Type: III
- Multi-Power - The Switch is On the Bottom of the Fixture

Technical Specifications

Electrical:

- Voltage: 480V AC/50~60 Hz
- Wattage: 200W/250W/300W
- Power Factor: >0.9
- Efficacy: 145 LPW

Mechanical:

- With Snap-on & Bolt Mounting Options for One- Person Installations. Select a Mounting Option (Sold Separately)
- LED: Lumileds Luxeon 2835 High Flux LED
- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- Cord Type: 6' SJTW 18/3 AWG cable
- 10KV Lightning Surge Protection
- Effective Projected Areas (EPA's) are: Front = 0.38 ft², Side = 0.30 ft², Face = 1.05 ft²
- Operating Temperature: -40°F to 104°F
- IP Rating: IP65, Suitable for Wet Locations
- 7-Year Warranty

Lighting:

- Dimming: 0~10V Dimmable
- Optic Lens Type: III
- Total Lumens: 43500LM Max.
- Color Temperature: 3000K/ 4000K/ 5000K
- Color Rendering Index: ≥ 80
- Beam Angle: 155°x75° Type III
- 70,000 Hours Rated Life

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID flood lights/ wall packs

Other Models:

- 150W | 21400LM | LFXMAX-LG-70-150W-MCTP-PSR-480V





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |




WG-ZB-Y6-2Z

Photometrics: LFXMAX-XL-200-300W-MCTP-PSR-480V



BUG Rating: B3-U0-G3

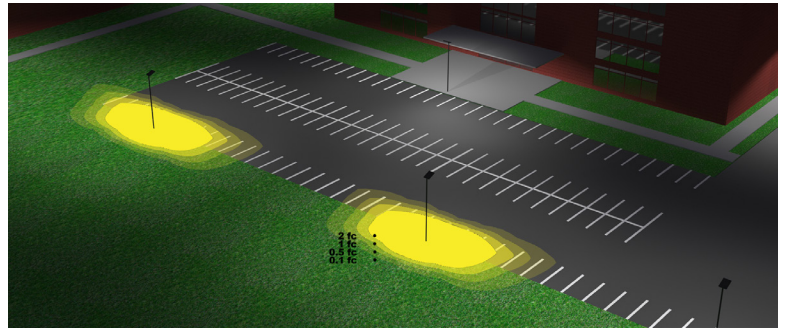

Area 55'x 100' Mounting Height: 20'

Other Views:



Side View



Front View



Back View

Performance Table: LFXMAX-XL-200-300W-MCTP-PSR-480V

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LFXMAX-XL-200-300W-MCTP-PSR-480V	200W 250W 300W	480V	29000LM 36250LM 43500LM	3000K 4000K 5000K	B3-U0-G3	145

Sample Ordering

Model	Size	Min.Watt	Max.Watt	Color Temp.	Feature	Volt
LFXMAX	XL	200	300W	MCTP	PSR	480V

Accessories Options

Blank = No Option for Accessories

WEC-3RC = Remote Control

Factory Installed Options

Blank = No Factory Installed Options

PC-TWIST-480V = 480V Twist Lock Photocell

WEC-3PR-78-AJ-WH = PIR Bi-Level Motion Sensor

WEC-3PBT-78-AJ-WH = Smart Bluetooth PIR Bi-Level Motion Sensor, Req. Westgate Smart Phone APP

SENSOR AND REMOTE CONTROL OPTIONS



WEC-3PR-78-AJ-WH
WEC-3PBT-78-AJ-WH



PC-TWIST-480V



WEC-3RC
Remote control

EPA Rating:


Model	0.8	1.25	1.44	1.89	1.7	2.34
LFX-XL	0.8	1.25	1.44	1.89	1.7	2.34




Shroud:



LFXMAX-XL-SHROUD-H
Reversible Shroud for 300W
14.88" (W) x 14.76" (H) x 5.07" (D)

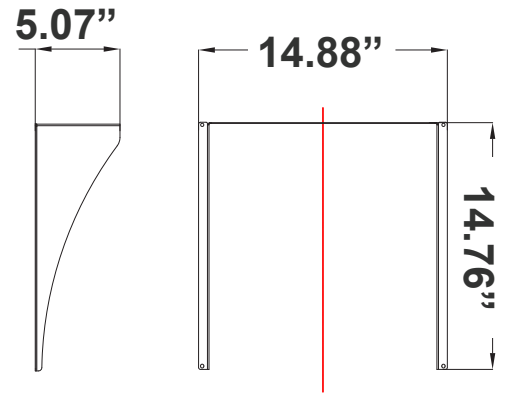



Mounting Options:

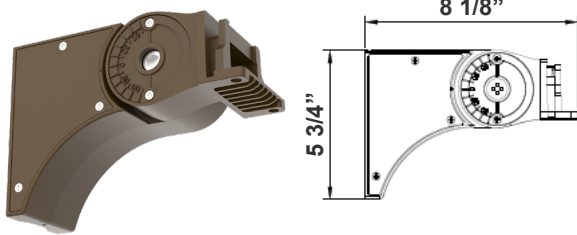


LFX-ASA
Adjustable Straight Arm
3 1/3" x 7 7/8"





LFX-YK
Yoke
5 3/4" x 6" x 2"

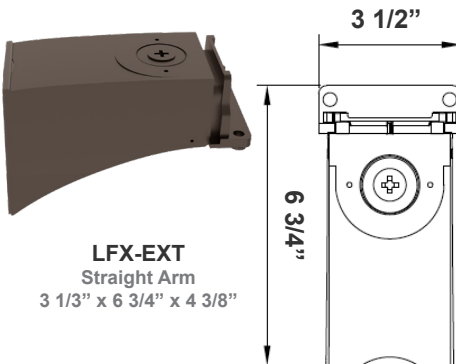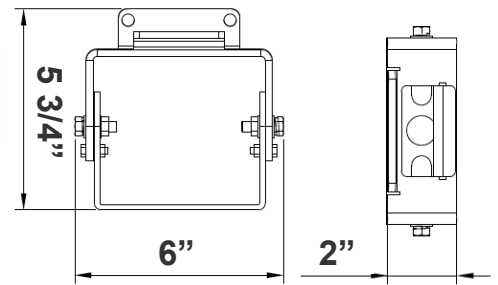

LFX-EXT
Straight Arm
3 1/3" x 6 3/4" x 4 3/8"




LFX-SF + LFX-PASF
Pole Adapter for Slip Fitter
6 1/8" x 3 1/4" x 3"

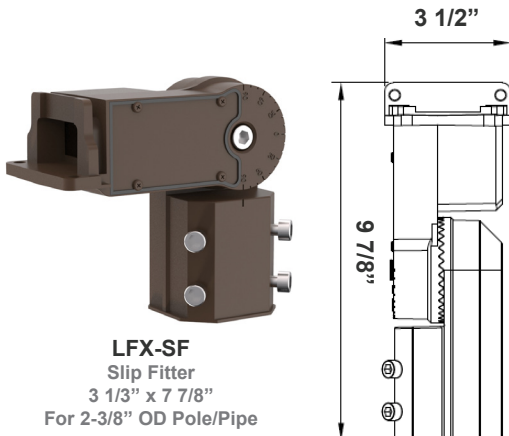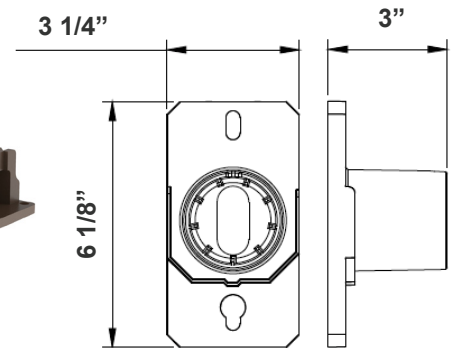



LFX-SF
Slip Fitter
3 1/3" x 7 7/8"
For 2-3/8" OD Pole/Pipe



LFX-AWB
Adjustable Wall Junction Box
7 1/8" x 6 5/8" x 5 3/4"

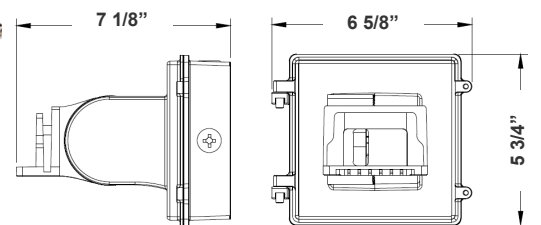

Type Lenses:

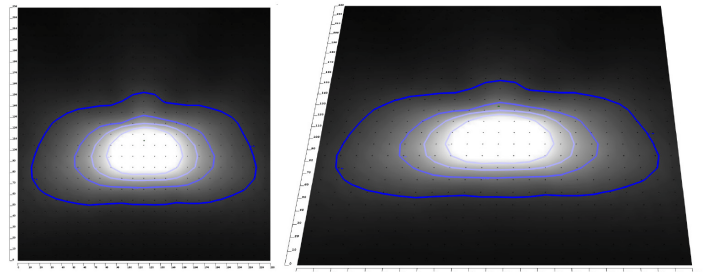
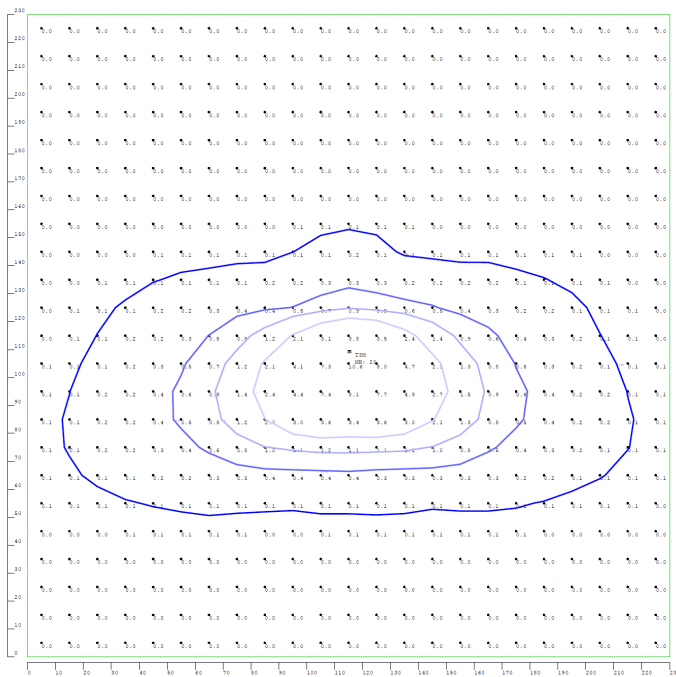


LFXMAX-XL-LENS-T3M LFXMAX-XL Type T3M Lens

- Offers Even Wider Light Distribution
- Ideal For Lighting Streets And Roadways
- Provides Uniform Illumination
- Pre-Installed





Type Lenses:

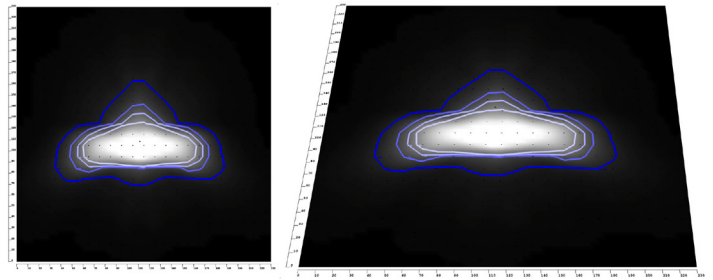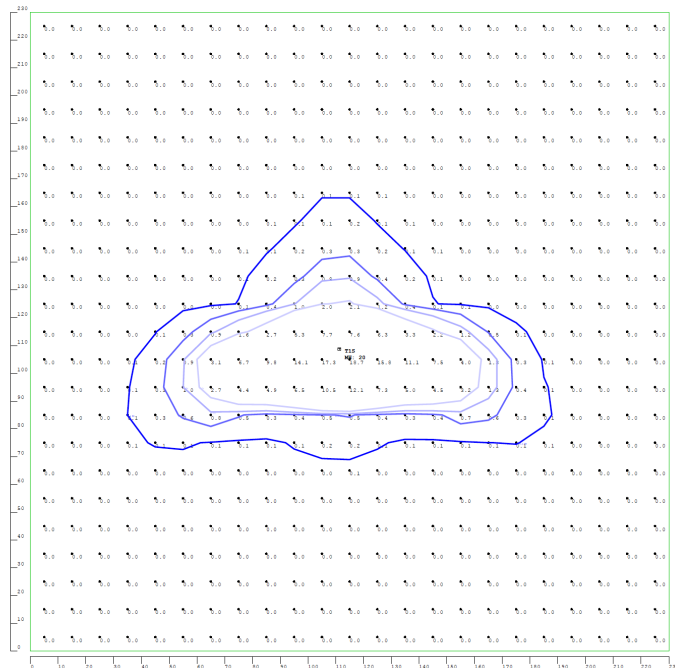

LFXMAX-XL-LENS-T1S LFMAX-XL Type T1S Lens

- Use It For Focused Lighting
- Great For Highlighting Specific Objects or Narrow Pathways

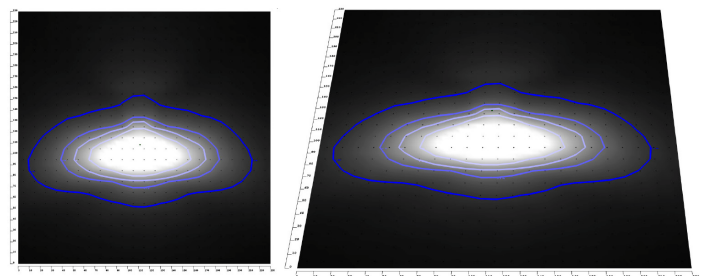
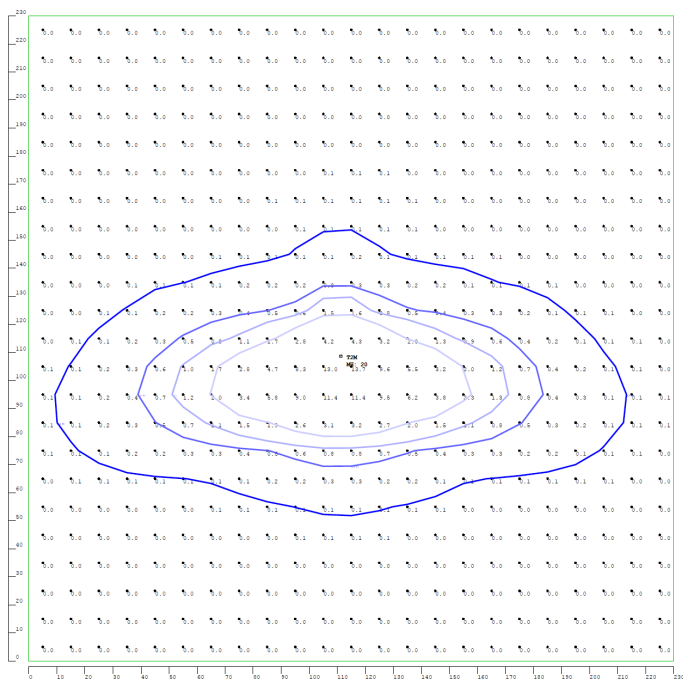


LFXMAX-XL-LENS-T2M LFMAX-XL Type T2M Lens

- Provides a broader beam of light.
- Suitable for general area lighting.
- Works well for walkways.





Type Lenses:

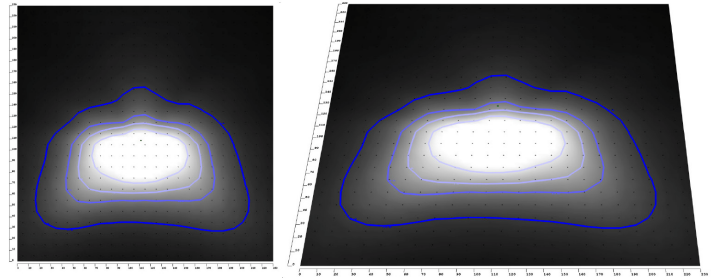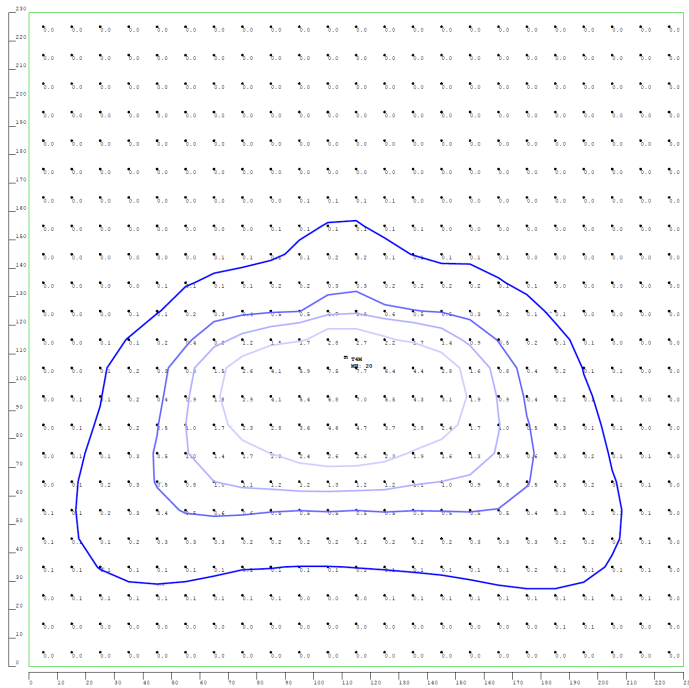

LFXMAX-XL-LENS-T4M LFMAX-XL Type T4M Lens

- Gives Asymmetrical Light Distribution
- Great For Pathways And Parking Lots
- Minimizes Light Spill Onto Nearby Areas

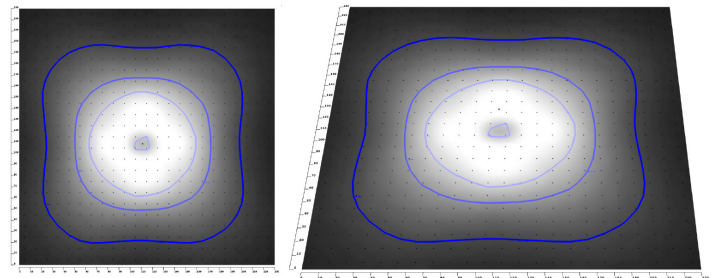
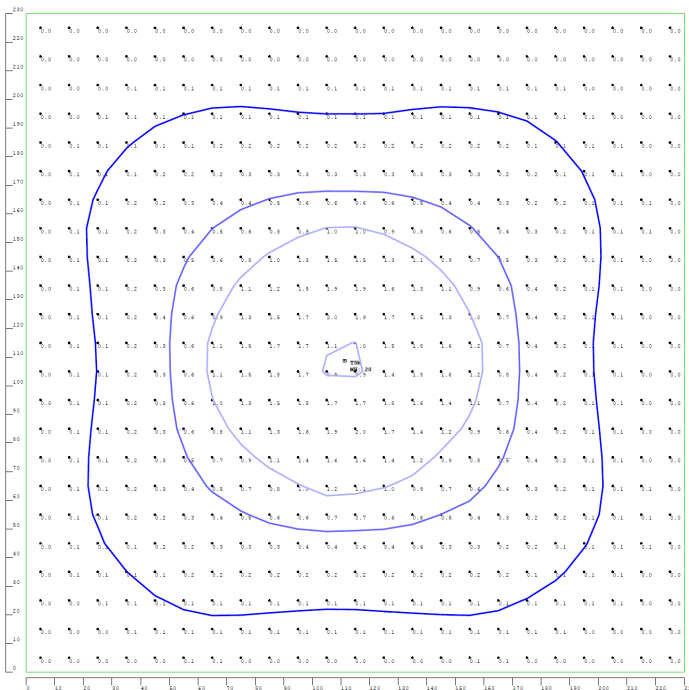


LFXMAX-XL-LENS-T5M LFMAX-XL Type T5M Lens

- Provides A Very Wide And Even Spread Of Light
- Perfect For Large Open Spaces Like Sports Fields
- Ensures Comprehensive Coverage





Type Lenses:

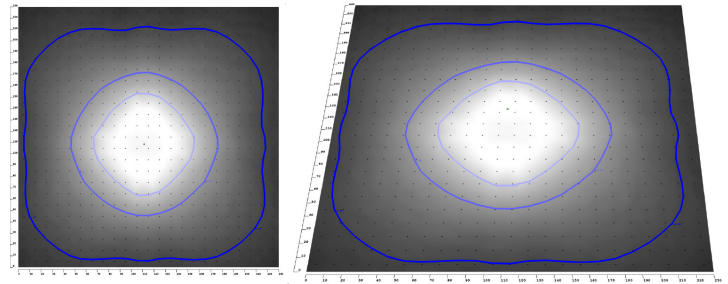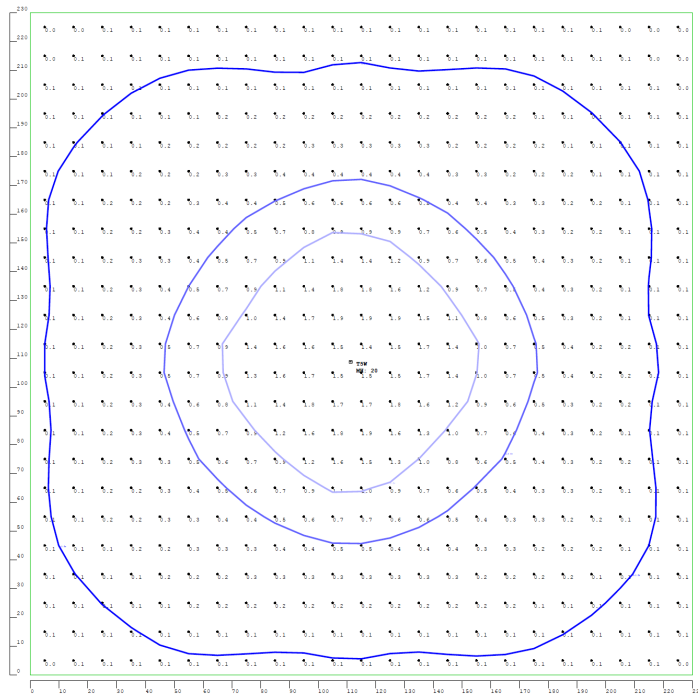

LFXMAX-XL-LENS-T5W LFMAX-XL Type T5W Lens

- Similar to T5M But Slightly Wider
- Use Where broader Coverage is Needed
- Suitable For Open Areas And Plazas

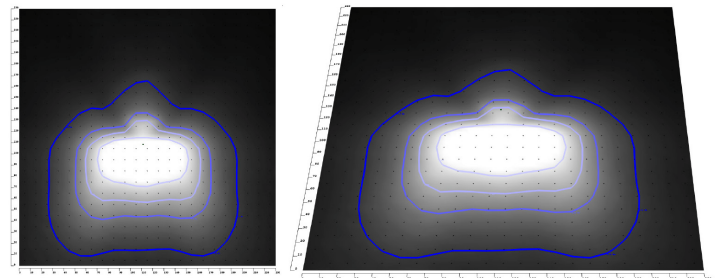
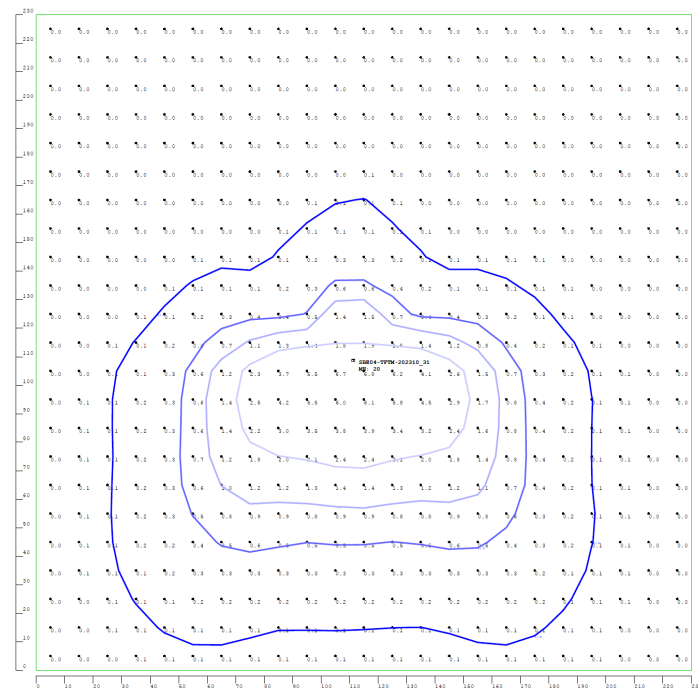


LFXMAX-XL-LENS-TFTM LFMAX-XL Type TFTM Lens

- Directs Light Forward For Specific Illumination
- Excellent For Architectural And Landscape Lighting
- Highlights Objects Or Features Effectively



Type Lenses:

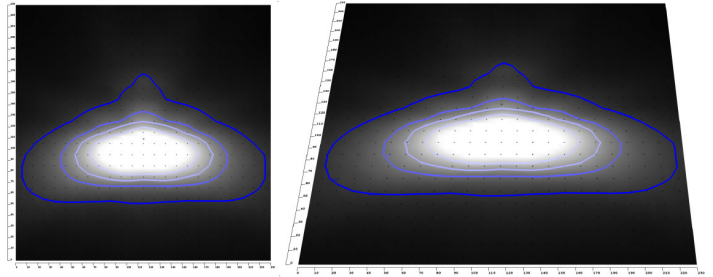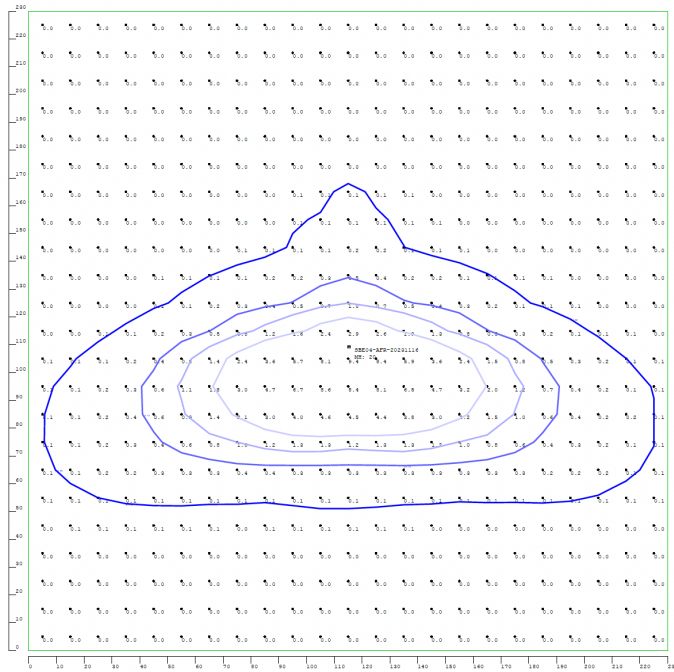

LFXMAX-XL-LENS-AFR LFMAX-XL Type AFR Lens

- **Sports Stadiums:** Long-range field illumination.
- **Outdoor Events:** Wide area coverage.
- **Security Lighting:** Enhanced distant visibility.
- **Architectural Lighting:** Highlighting tall structures.

