

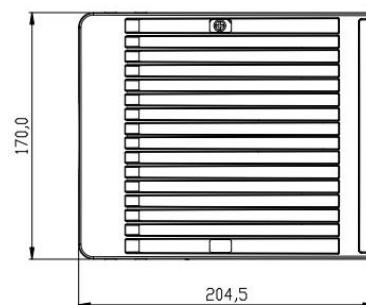


NAME: LED Wallpack Light

P/N: 44055601

Advantage:

- UL DLC certificate
- Philips Lumileds Chip, high CRI
- IP65 driver, input voltage 100-277VAC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury.

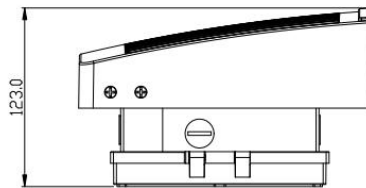

Application:

- ◆ entrance lighting, courtyard lighting;
- ◆ Industrial lighting, Outdoor landscape lighting;
- ◆ Building, The hotel;
- ◆ All kinds of residential area.

Product Specifications

Product name	LED Wallpack Light
Part No	44055601
Dimension	204.5*170*123mm

Technical Characteristic

Color temperature	4000K	5000K	5700K
CRI	>70		
Lumen	5830-6380LM		
Lumen Efficacy	106-116 LM/W		
Input Power	55W		
Viewing Angle	100*50°		
Input Voltage	100-277VAC	50/60Hz	
Driver model	China Brand Driver		
PF	>0.9		
Waterproof Rating	WET (IP65)		

Materials

LED Brand	PHILIPS LUMILEDS
LED Type	LUXEON 3030 2D (1.5W)
LED QTY	70 PCS
Housing	Aluminum
Optional Accessory	Photocell


Others

Operating Temperature	-20℃ TO 45℃
Operating Humidity	20%-90% RH
Storage Temperature	-30℃ TO 80℃
Storage Humidity	10%-95%
Application	Outdoor
Safety Certification	UL, DLC
Warranty Time	5 Years

Package

Lamps Net Weight: 2Kg/pcs

	Size	Qty/Carton	Weight/Carton
Inner box	236*226*270mm	1 PCS	2.6KG
Outer box	468*249*290mm	2 PCS	5.7KG

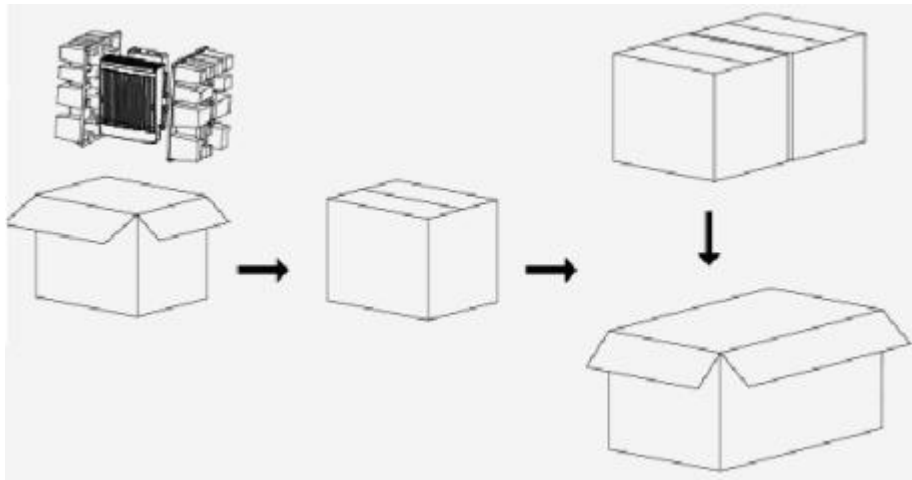

Notice For User

- ◆ Please turn off power before install or change assembly parts.
- ◆ The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- ◆ No-professionals, must not install and disassemble the lamps.

Trouble Shootings

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies
Out of working	Please check the connection