



NAME: LED Wall Pack Light

P/N : TS-RWP02-120WAT1NA1-aaK

Note: "aaK" in the model name refers to CCT as below:


40K=4000K,50K=5000K,57K=5700K

Advantage:

- UL DLC certificate
- IP65 Internal driver
Input voltage 100-277VAC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Instant start, NO humming
- Green and eco-friendly without mercury

Application:

- ◆ entrance lighting, courtyard lighting
- ◆ Industrial lighting, Outdoor landscape lighting
- ◆ Building, The hotel
- ◆ Wall lighting area and so on

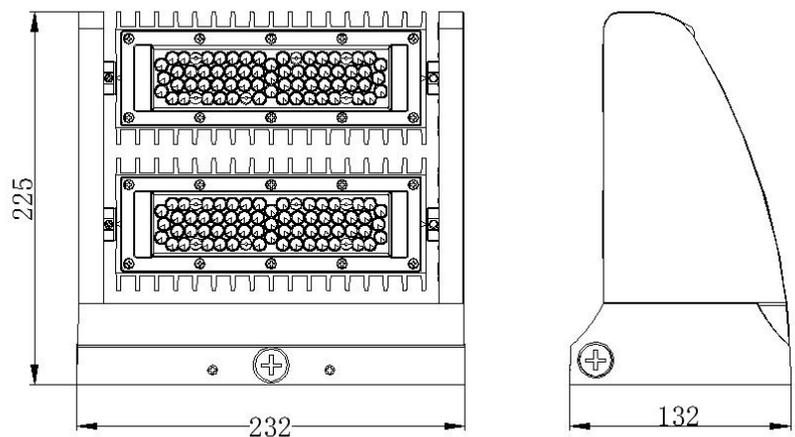

Product Specifications

Product name	LED Wall Pack Light
Part No	TS-RWP02-120WAT1NA1-aaK
Dimension	232 x 132 x225 mm

Technical Characteristic

Color temperature	4000K, 5000K, 5700K
CRI	>70
Lumen	14400-15600LM
Lumen Efficacy	120-130LM/W
Input Power	120W
Viewing Angle	60°
Input Voltage	100-277VAC 50/60Hz
Driver model	China Driver Brand
PF	>0.9
Waterproof Rating	IP65

Materials

LED Brand	PHILIPS LUMILEDS
LED Type	LUXEON 3030 2D
LED QTY	126 PCS
Housing	Aluminum
Housing color	Black


Others

Operating Temperature	-20°C TO 45°C
Operating Humidity	20%-90% RH
Storage Temperature	-30°C TO 80°C
Storage Humidity	10%-95%
Application	Indoor / Outdoor
Safety Certification	UL DLC
Warranty Time	5 Years

Package

Lamps Net Weight: 3.38kg / pcs

	Size	Qty/Carton	Weight/Carton
Outer box	390*300*290mm	2	8.4 kg

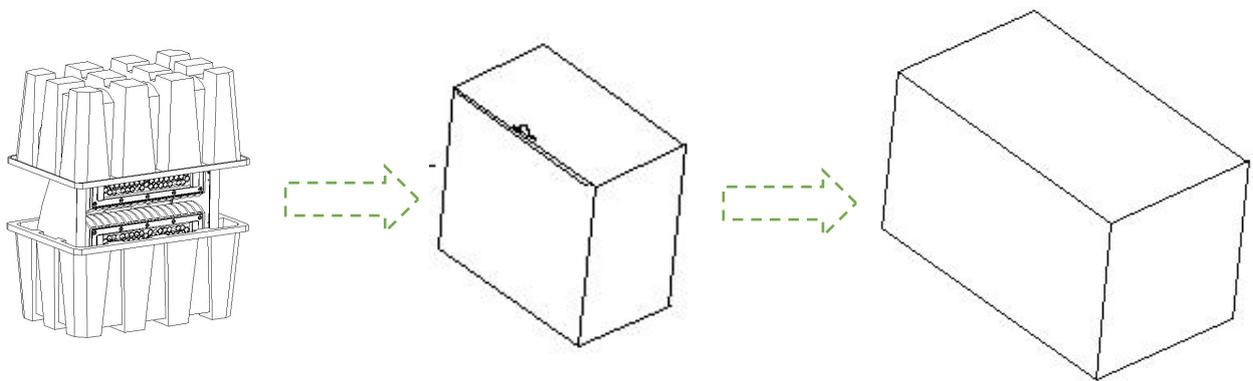

Notice For User

- ◆ Please turn off power before install or change assembly parts.
- ◆ The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- ◆ No-professionals, must not install and disassemble the lamps.

Trouble Shootings

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies
Out of working	Please check the connection