




NAME: LED Wall Pack Light

P/N : TS-RWP02-40WAT1NA1-aaK

Note: "aaK" in the model name refers to CCT as below:  
40K=4000K,50K=5000K,57K=5700K

### Advantage:

- UL DLC certificate
- IP65 Internal driver, Input voltage 100-277VAC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Instant start, NO humming
- Green and eco-friendly without mercury.

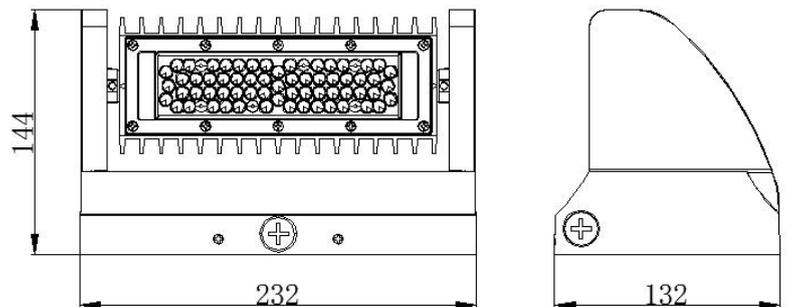

### Application:

- ◆ entrance lighting, courtyard lighting
- ◆ Industrial lighting, Outdoor landscape lighting;
- ◆ Building, The hotel;
- ◆ Wall lighting area and so on.

**Product Specifications**

Product name	LED Wall Pack Light
Part No	TS-RWP02-40WAT1NA1-aaK
Dimension	232 x 132 x144 mm

**Technical Characteristic**

Color temperature	4000K, 5000K, 5700K
CRI	>70
Lumen	4800-5200LM
Lumen Efficacy	120-130LM/W
Input Power	40W
Viewing Angle	60°
Input Voltage	100-277VAC 50/60Hz
Driver model	China Driver Brand
PF	>0.9
Waterproof Rating	IP65

**Materials**

LED Brand	PHILIPS LUMILEDS
LED Type	LUXEON 3030 2D
LED QTY	49 PCS
Housing	Aluminum
Housing color	Black


**Others**

Operating Temperature	-20°C TO 45°C
Operating Humidity	20%-90% RH
Storage Temperature	-30°C TO 80°C
Storage Humidity	10%-95%
Application	Indoor / Outdoor
Safety Certification	UL DLC
Warranty Time	5 Years

## Package

**Lamps Net Weight: 2.02kg / pcs**

	Size	Qty/Carton	Weight/Carton
Outer box	370*290*405mm	4	10.1 kg

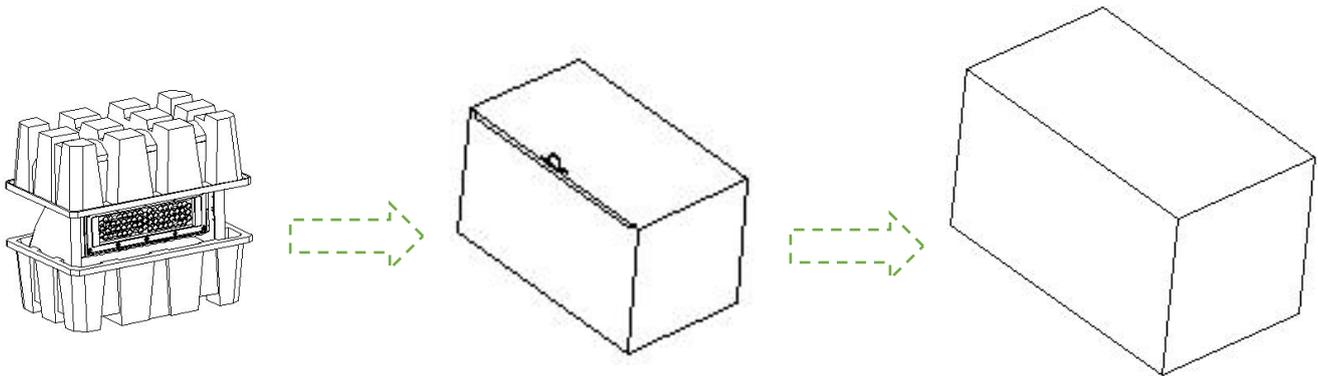

## Notice For User

- ◆ Please turn off power before install or change assembly parts.
- ◆ The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- ◆ No-professionals, must not install and disassemble the lamps.

## Trouble Shootings

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies
Out of working	Please check the connection