

NAME: LED Wall Pack Light


P/N : 44080501

### Advantage:

- UL DLC certificate
- IP65 Internal driver, Input voltage 100-277VAC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Instant start, NO humming
- Green and eco-friendly without mercury.

### Application:

- ◆ entrance lighting, courtyard lighting
- ◆ Industrial lighting, Outdoor landscape lighting;
- ◆ Building, The hotel;
- ◆ Wall lighting area and so on.

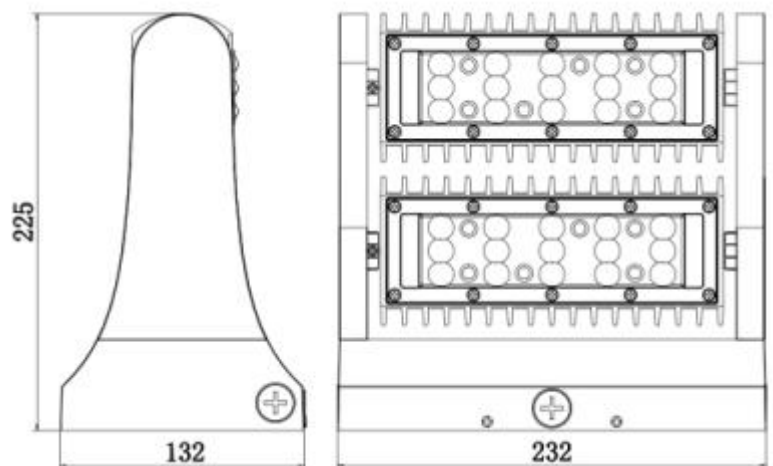

**Product Specifications**

Product name	LED Wall Pack Light
Part No	44080501
Dimension	232 x 132 x225 mm

**Technical Characteristic**

Color temperature	4000K	5000K	5700K
CRI	>70		
Lumen	10000-10800LM		
Lumen Efficacy	125-135LM/W		
Input Power	80W		
Viewing Angle	60°		
Input Voltage	100-277VAC	50/60Hz	
Driver model	China Brand Driver		
PFC	>0.9		
Waterproof Rating	IP65		

**Materials**

LED Brand	CREE
LED Type	MHB-B
LED QTY	30 PCS
Housing	Aluminum
Housing color	Black


**Others**

Operating Temperature	-20°C TO 45°C
Operating Humidity	20%-90% RH
Storage Temperature	-30°C TO 80°C
Storage Humidity	10%-95%
Application	Indoor / Outdoor
Safety Certification	UL, DLC
Warranty Time	5 Years

### Package

**Lamps Net Weight: 3.03kg/pcs**

	Size	Qty/Carton	Weight/Carton
Outer box	495 x 295 x 265 mm	4	13.8 kg

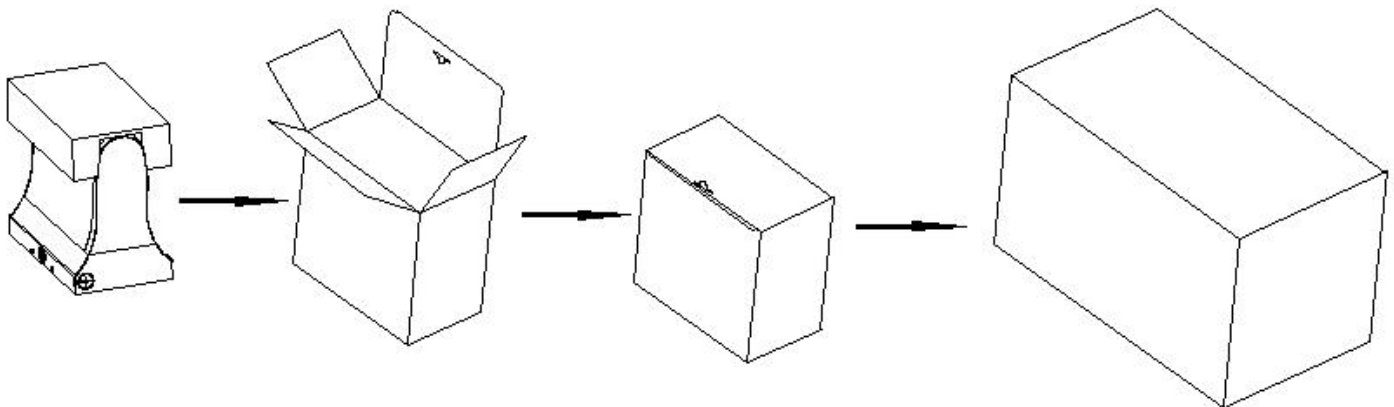

### Notice For User

- ◆ Please turn off power before install or change assembly parts.
- ◆ The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- ◆ No-professionals, must not install and disassemble the lamps.

### Trouble Shootings

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies
Out of working	Please check the connection