

### **TECHNICAL DATA SHEET**



NAME: LED ShoeBox Light

P/N: 4130022X

Note: The Letter X in P/N stands for mounting bracket:

1: ADJUSTABLE FITTER MOUNTING

2: DIRECT MOUNTING

3: YOKE MOUNTING


#### Advantage:


- UL DLC certificate
- > PHILIPS Chip, high CRI
- Mean Well IP65 driver,input voltage 200-480VAC
- No UV or IR in the beam
- > Easy to install and operate
- > Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- > Green and eco-friendly without mercury.


### Application:

- > 1. Outdoor basketball court, tennis court.
- > 2. Badminton court, the football field.
- 3. The school playground, stadium.
- 4. Community leisure entertainment plaza, road lamp etc.









#### TOSMART TECHNOLOGY CO LTD

Tel: 509-342-2802 E-mail:simon@tosmart-tech.com



# **TECHNICAL DATA SHEET**

### **Product Specifications**

Product name	LED Shoe Box Light		
Part No		4130022X	
Light Type	Shoe Box Light		
Dimension	558*405*116mm	565*405*116mm	517*405*116mm

### **Technical Characteristic**

Color temperature	4000k	5000K	5700K
CRI	>70		
Lumen	36000-39000LM		
Input Power		300W	
Viewing Angle	150*85 Degree (Type III)		
Input Voltage		200-480V	
Driver model		HVG-320-48A	
PFC		>0.9	
Waterproof Rating	IP65		

# Materials

LED Brand	PHILIPS LUMILEDS
LED Type	LUXEON 3030 2D (1.5W)
LED QTY	280PCS
Housing	Magnesium + Aluminum
Housing color	Black
Operating Temperature	-20℃ TO 45℃
Operating Humidity	20%-90% RH
Storage Temperature	-30℃ TO 80℃

### Others

Storage Humidity	10%-95%
Application	Outdoor
Safety Certification	UL, DLC
Warranty Time	5 Years

#### **TOSMART TECHNOLOGY CO LTD**


Tel: 509-342-2802 E-mail:simon@tosmart-tech.com




### Package

# Lamps Net Weight: 13.1Kg/pcs

	Size	Qty/Carton	Weight/Carton
Outer box	630*475*185mm	1	14.7 kg

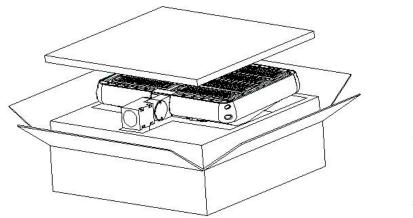



### **Notice For User**

- Please turn off power before install or change assembly parts.
- ◆ The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- ◆ No-professionals, must not install and disassemble the lamps.

### **Trouble Shootings**

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies
Out of working	Please check the connection

#### TOSMART TECHNOLOGY CO LTD

Tel: 509-342-2802 E-mail: